



## Horizontal Slider

A slim and versatile horizontal sliding system that provides easy access for cleaning and ventilation, and is suitable for treating most window types. Available with 2, 3, 4 or 5 sliding sashes (panels).

Head Detail

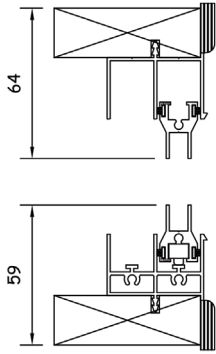

Cill Detail

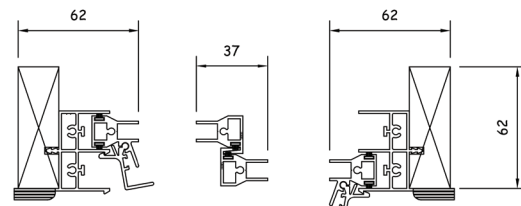

Jamb Detail

Interlock Stile

Jamb Detail

### Features

- Slim, unobtrusive aluminium profile
- Smooth sliding action on panels for easy operation using brass wheels
- All panels lift out for complete access to primary window
- Improved noise and thermal installation
- Suitable to have bevelled timber subframe to fix in to bays /splayed reveals
- Can be coupled or stacked with other units in the range to treat large areas of glazing or long runs of windows
- Available in right hand (RH) or left hand (LH) orientation

### Variations of Basic Unit

- Locking and non-locking fitch lock available to secure panels (fitted to the interlock sections)
- Standard and acoustic trickle vents are available
- Can be coupled and stacked using a heavy duty frame coupling section or timber to timber
- Unit available with no subframe
- Larger trims and timber trims available at additional cost
- Variety of stock colours available, including all RAL options
- Can accept flyscreen mesh

### Specification

- Glazing options: 4mm - 6.8mm
- Choice of timber subframes
- Pre-drilled and countersunk to suit either face fix or reveal fix
- Woolpile inserted in to panel section groove to create outer frame seal
- Gasket colour option of black or white
- PVCu trims supplied for the face of the units to create a neat, clean finish
- Standard colour white high gloss - RAL 9910



#### Optimum Noise Reduction: 52dB (Rw)

Using 6.4mm acoustic laminate glazing, with 200mm glass-to-glass




#### Optimum U Value: 1.868 W/m<sup>2</sup>K

Using 4mm toughened Low E glazing, with 80mm glass-to-glass


Traditional Configurations

Based on 4mm Glass


SS2




C03 (Centre Opening)




SS3



SS4



SS5



Max width:

2,400mm

3,600mm

3,600mm

4,900mm

4,900mm

or Max height:

1,800mm

1,800mm

1,800mm

1,800mm

1,800mm